



# WYLEX ENTERPRISE SDN. BHD. (1134841-P)

No. 25 & 27, Jalan Utama 1/10, Taman Perindustrian Puchong Utama,  
47100 Puchong, Selangor Darul Ehsan.

Tel : 03-8060 1723 Fax : 03-8060 1721 H/P : 019-337 8520

E-mail : wylexap28@gmail.com Website : www.wylex.com.my




## Type 'A' Bracket

- Size Range** : 1" – 8"
- Material** : Mild Steel
- Finishes** : Hot-Dipped Galvanized / Electro-zinc
- Services** : Recommended for suspension of non-insulated, stationary pipe lines.



## U-Bolt C/W Nuts

- Size Range** : 1/2" – 12"
- Material** : Mild Steel
- Finishes** : Hot-Dipped Galvanized / Electro-zinc
- Services** : Recommended for suspension of non-insulated, stationary pipe lines.

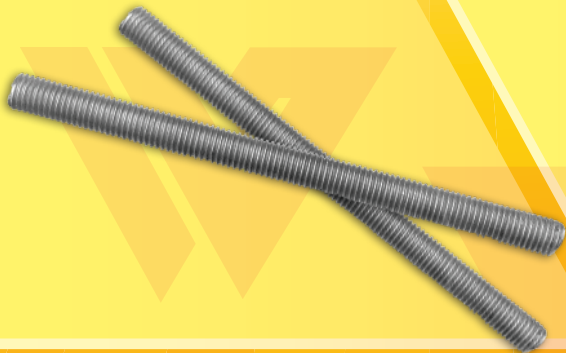

## Stud Rod

- Diameter** : 10mm, 12mm, 14mm, 16mm, 3/8", 1/2", 5/8", 3/4"
- Material** : Mild Steel
- Finishes** : Hot-Dipped Galvanized / Electro-zinc
- Services** : Recommended for suspension of non-insulated, stationary pipe lines.



## Washer, Bolts & Nuts

- Size Range** : 1/2" – 3/4"
- Material** : Mild Steel
- Finishes** : Hot-Dipped Galvanized / Electro-zinc
- Services** : Recommended to provide strong bond between components under great amounts of pressure.

### Pipe Ring Type A



<b>Size Range</b>	: 1" - 8"
<b>Material</b>	: Mild Steel
<b>Finish</b>	: Hot-Dip Galvanized
<b>Service</b>	: Recommended for suspension of non-insulated, stationary pipe lines.
<b>Maximum Temperature</b>	: 650 °F
<b>Complies with</b>	: Federal Specification WW-H-171E (Type 10) and Manufacturers. Standardization Society SP-69 (Type 10)
<b>Features</b>	: - Permits installation before or after pipe is in place. - Provides economical installation.
<b>Ordering</b>	: Specify pipe size, figure number, name.

### Pipe Ring Type B



<b>Size Range</b>	: 2" - 8"
<b>Material</b>	: Mild Steel
<b>Finish</b>	: Hot-Dip Galvanized
<b>Service</b>	: Recommended for suspension of non-insulated, stationary pipe lines.
<b>Maximum Temperature</b>	: 450 °F
<b>Complies with</b>	: Federal Specification WW-H-171E (Type 25) and Manufacturers. Standardization Society SP-69 (Type 12)
<b>Features</b>	: - Rapid installation assured by hinged design and single closure screw. - When used with nipple, this clamp is particularly adaptive for use on refrigeration or compressor piping subject to vibration. - Interior design provides firm grip on pipe. - Inside of ring tapered to prevent entrapment of condensed moisture.
<b>Ordering</b>	: Specify pipe size, figure number, name.

### Pipe Ring Type C



<b>Size Range</b>	: 1" - 8"
<b>Material</b>	: Mild Steel
<b>Finish</b>	: Hot-Dip Galvanized
<b>Service</b>	: Recommended for suspension of non-insulated pipe lines or conduits.
<b>Maximum Temperature</b>	: 450 °F
<b>Complies with</b>	: Federal Specification WW-H-171E (Type 11) and Manufacturers. Standardization Society SP-69 (Type 11)
<b>Features</b>	: - Permits installation before or after pipe is in place. - Provides economical installation.
<b>Ordering</b>	: Specify pipe size, figure number, name.

### Pipe Ring Type D



<b>Size Range</b>	: 3/4" - 10"
<b>Material</b>	: Mild Steel
<b>Finish</b>	: Hot-Dip Galvanized
<b>Service</b>	: Recommended for suspension of cold pipe lines or hot lines where little or no insulation is required.
<b>Maximum Temperature</b>	: 750 °F
<b>Complies with</b>	: Federal Specification WW-H-171E (Type 4) and Manufacturers. Standardization Society SP-69 (Type 4)
<b>Installation</b>	: Normally used with bolt and nut or hanger rod.
<b>Features</b>	: - Load rating meet ANSI code requirements and are substantiated by laboratory test. - Clamps tightly to pipe. - Wide range of sizes.
<b>Ordering</b>	: Specify pipe size, figure number, name.

### Pipe Ring Type E



<b>Size Range</b>	: 1" - 8"
<b>Material</b>	: Mild Steel
<b>Finish</b>	: Hot-Dip Galvanized
<b>Service</b>	: Recommended for suspension of non-insulated, stationary pipe lines.
<b>Maximum Temperature</b>	: 650 °F
<b>Complies with</b>	: Federal Specification WW-H-171E (Type 26) and Manufacturers. Standardization Society SP-69 (Type 26).
<b>Ordering</b>	: Specify pipe size, figure number, name.

### Adjustable Clevis Hanger



<b>Size Range</b>	: 3/4" - 12"
<b>Material</b>	: Mild Steel
<b>Finish</b>	: Hot-Dip Galvanized
<b>Service</b>	: Recommended for suspension of non-insulated, stationary pipe lines.
<b>Maximum Temperature</b>	: 650 °F
<b>Complies with</b>	: Federal Specification WW-H-171E (Type 1) and SP-69 (Type 1)
<b>Installation</b>	: Hanger load nut above clevis must be tightened securely to assure proper hanger performance.
<b>Adjustment</b>	: Vertical adjustment without removing pipe may be made from 1 1/8" to 5". Varying with the size of clevis. Tighten upper nut after adjustment.
<b>Features</b>	: - Design has yoke on outside of lower U-strap so yoke cannot slide toward centre of bolt is minimized. - Sizes 2 1/2" and up have rod and two nuts instead of bolt and nut, thread length on clevis rod is such that the threads locks the nuts in place and threads are not in shear place.
<b>Ordering</b>	: Specify pipe size, figure number, name.